


Diameter	Select (✓)
$\phi 19$	
$\phi 22$	
$\phi 24$	
	i=

Efficiency: 96% Temperature: $-25\text{ }^{\circ}\text{C} \sim 90\text{ }^{\circ}\text{C}$
 Rated speed: 3000RPM Maximum speed: 4500RPM
 Lubrication: Long term Service life: 20000h
 IP code: IP65

ZAE120-L1- | -25-003-FT-| | -XJG

x58/ $\phi 95 \times 4/4 - \phi 9 - \phi 130$

Ratio	3	4	5	7	10
Rate torque NM	148	222	235	158	93
Max. torque NM	2 time rate torque				
Inertia Kgcm ²	1.65	1.22	1.15	1.13	1.11
Radial load N	2230				
Axial load N	1550				

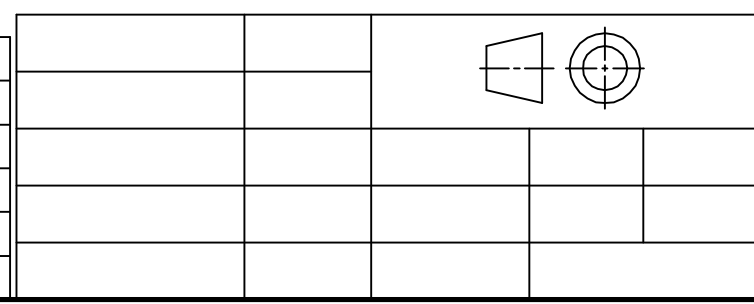

ZAE120-L1- | | -S2-P2

