

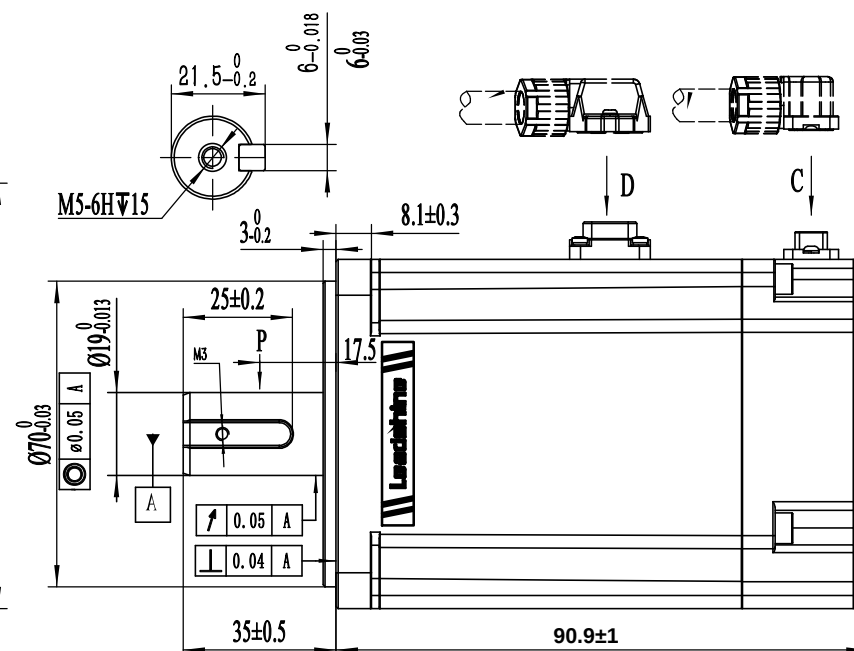


[illegible]

| Wiring details of Power cable connector |       |       |     |         |    |    |
|-----------------------------------------|-------|-------|-----|---------|----|----|
| Pos                                     | 1     | 2     | 3   | 4       | -- | -- |
| Signal                                  | U     | V     | W   | PE      | -- | -- |
| Color                                   | black | white | red | Yel/Gre | -- | -- |



| Wiring details of encoder cable connector |        |        |     |       |      |        |       |       |
|-------------------------------------------|--------|--------|-----|-------|------|--------|-------|-------|
| 4                                         | Pos    | 1      | 2   | 3     | 4    | 5      | 6     | 7     |
| 3                                         | Signal | PE     | 5V  | 0V    | SD+  | SD-    | Bat+  | Bat-  |
| 2                                         | Color  | shield | red | black | blue | yellow | brown | white |
| 1                                         |        |        |     |       |      |        |       |       |

| Speed (r/min) | Torque (N.m) - Intermittent Zone | Torque (N.m) - Continuous Zone |
|---------------|----------------------------------|--------------------------------|
| 0 - 3000      | 7.17                             | -                              |
| 3000          | -                                | 4.78                           |
| 5000          | -                                | 2.39                           |

80mm, high inertia, 750w servo motor  
23bit optical encoder, no brake